


PERFORMANCE VALUES FOR FLOOR HEATINGS

with capillary tube mat OPTIMAT SB 20
with capillary tube mat FOLIMAT FSB 20




HEATING CAPACITY WITH OPTIMAT SB 20

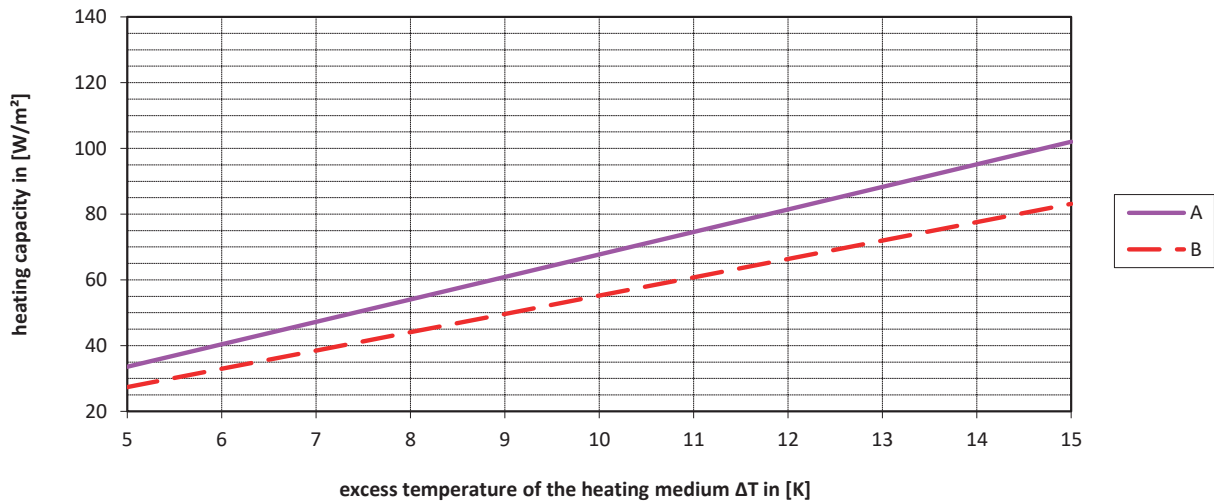

A - OPTIMAT in cement screed $d = 45$ mm and tiles $d = 15$ mm ($\lambda = 1,05$ W/mK)
B - OPTIMAT in cement screed $d = 45$ mm and strip parquet $d = 10$ mm ($\lambda = 0,21$ W/mK)



HEATING CAPACITY WITH FOLIMAT FSB 20

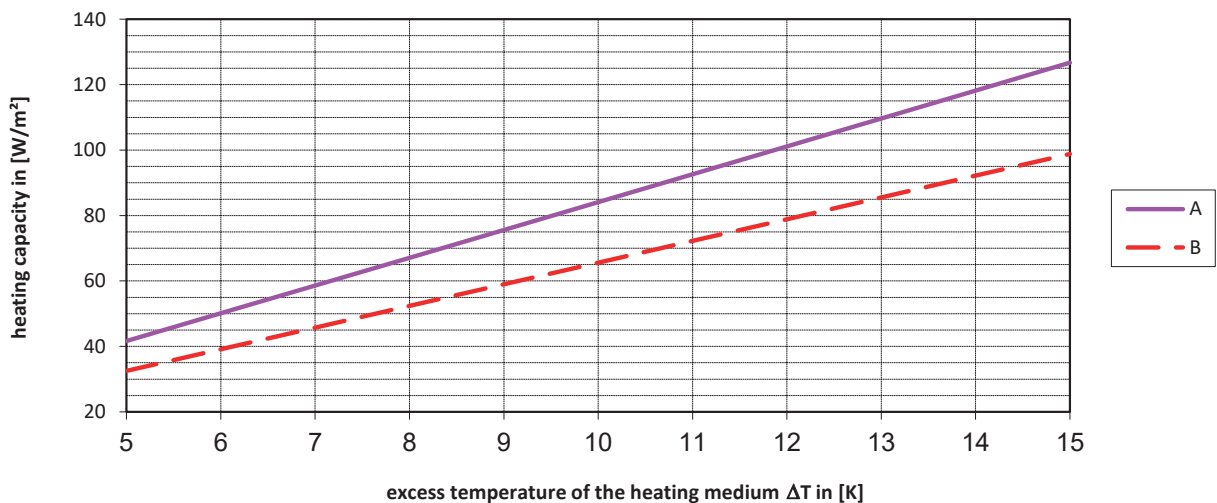

A - FOLIMAT in grouting compound $d = 10$ mm and tiles $d = 15$ mm ($\lambda = 1,05$ W/mK)
B - FOLIMAT in grouting compound $d = 10$ mm and strip parquet $d = 10$ mm ($\lambda = 0,21$ W/mK) glued

CONTACT

Clima Heiz- und Kühlelemente GmbH
Eichhorster Weg 80 | 13435 Berlin

Fon: + 49 30 402054 – 0
Fax: + 49 30 402054 – 19

www.clima.de
info@clima.de